




Delock Slot bracket SATA 6 Gb/s 7 pin receptacle + Molex 2 pin power plug internal > SATA male pin 8 power external

Description

This slot bracket by Delock allows the external connection of e.g. a SATA DOM memory module with SATA pin 8 power connector to a PC. The power supply is provided by the Molex 2 pin plug.

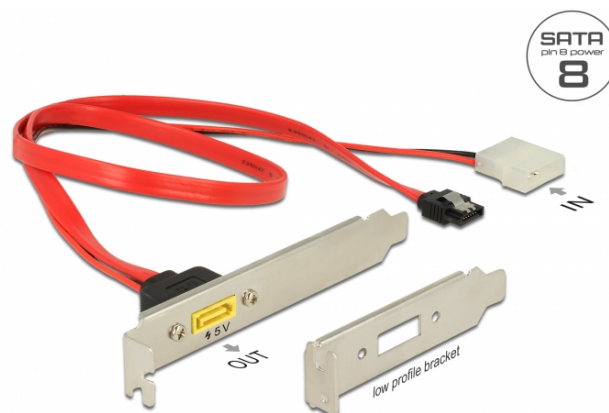

60 cm / 30 cm

Specification

- Connectors:
 - 1 x SATA 6 Gb/s 7 pin receptacle +
 - 1 x Molex 2 pin power plug >
 - 1 x SATA 6 Gb/s plug pin 8 power with latchtype
- E.g. for SATA DOM memories (e.g. for [Delock item 54776](#))
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Voltage: 5 V
- Cable gauge:
 - 26 AWG data line
 - 18 AWG power line
- Cable diameter: ca. 2.2 mm
- Cable length without connectors:
 - SATA cable: ca. 60 cm
 - Molex cable: ca. 30 cm

System requirements

- PC with one free slot
- Power supply with a free Molex power connector
- A free SATA 7 pin plug on the motherboard

Package content

- Standard slot bracket
- Low profile slot bracket for exchange


Item no. 84949

EAN: 4043619849499

Country of origin: China

Package: Zip poly bag

Images





General	
Specification:	SATA 6 Gb/s
Interface	
Connector 1:	1 x SATA 6 Gb/s 7 pin receptacle 1 x Molex 2 pin male
Connector 2:	1 x SATA 6 Gb/s 8 pin plug
Technical characteristics	
Data transfer rate:	6 Gb/s
Voltage:	5 V
Physical characteristics	
Cable diameter:	2,2 mm
Conductor gauge:	26 AWG data line 18 AWG power line
Length:	30 cm 60 cm