



CS44ZC Category 6A F/FTP Cable, low smoke zero halogen, white jacket, 4 pair count, 1640 ft (500 m) length, reel

Product Classification

Regional Availability	EMEA
Portfolio	NETCONNECT®
Product Type	Twisted pair cable


General Specifications

Product Number	CS44ZC
ANSI/TIA Category	6A
Cable Component Type	Horizontal
Cable Type	F/FTP (shielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Jacket Color	White
Pairs, quantity	4
Transmission Standards	IEC 61156-5 Grade 2 IEC 61156-5 Type Ib ISO/IEC 11801 Class EA

Dimensions

Cable Length	1640 ft 499.872 m
Cable Length Tolerance	±5%
Diameter Over Jacket, nominal	0.276 in 7.01 mm
Jacket Thickness	0.025 in 0.635 mm
Conductor Gauge, singles	23 AWG

Cross Section Drawing

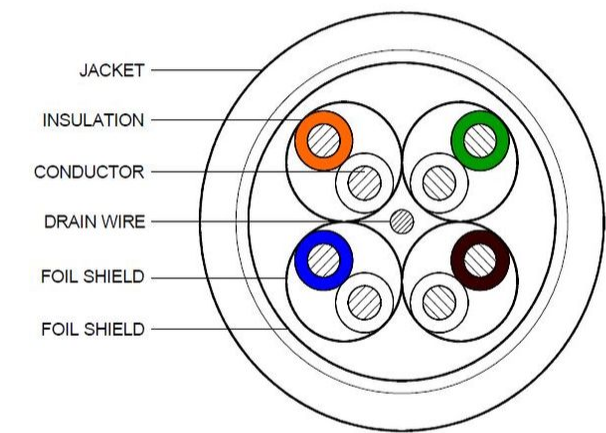

Electrical Specifications

dc Resistance Unbalance, maximum	2 %
dc Resistance, maximum	7.61 ohms/100 m 2.32 ohms/100 ft
Mutual Capacitance at Frequency	4.2 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	79 %
Operating Frequency, maximum	500 MHz
Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO /IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A

Material Specifications

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	Low Smoke Zero Halogen (LSZH)
Shield (Tape) Material	Polyester/Aluminum shield

Mechanical Specifications

Pulling Tension, maximum	25 lb 11.34 kg
--------------------------	------------------

Environmental Specifications

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Acid Gas Test Method	EN 50267-2-3
EN50575 CPR Cable EuroClass Fire Performance	Cca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d1
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)
Smoke Test Method	IEC 61034-2

Packaging and Weights

Cable weight	32.59 lb/kft 4.506 kg/km
Packaging Type	Reel

Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

