




Delock PCI Express Card to 1 x Serial RS-232

Description

The PCI Express card by Delock expands a PC by one external serial RS-232 port. Devices such as scanners, protocol converters, POS systems, infrared -, IoT - devices etc. and different modes can be used. By using the included low profile brackets, the PCI Express card can be also installed into a Mini-PC.

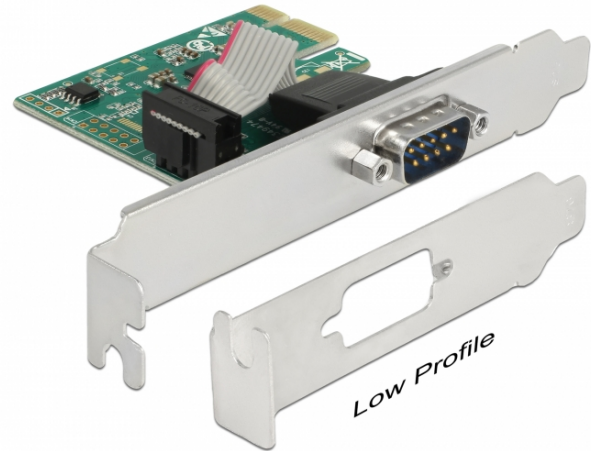

Specification

- Connectors:
 - 1 x serial RS-232 DB9 male
 - 1 x PCI Express x1, V2.0
- Chipset: ASIX AX99100
- Compatible with 16C950 UART
- Supports Active State Power Management (ASPM)
- Supports Direct Memory Access (DMA)
- Modes
 - Supports slow IrDA mode up to 115 Kbps
 - Supports Multi-Drop 9-bit mode
- Data transfer rate up to 230.4 Kb/s
- FIFO: 256 byte
- Databits: 5, 6, 7, 8, 9
- Stop bits: 1, 1.5, 2
- Parity: even, odd, none, mark, space
- Flow control: none, hardware RTS / CTS, software XON / XOFF
- Operating temperature: 0 °C ~ 55 °C
- Relative humidity: 10 - 90 %
- Dimensions (LxWxH): ca. 64 x 60 x 16 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- 1 x low profile bracket
- Driver CD
- User manual

Item no. 89948

EAN: 4043619899487

Country of origin: China

Package: Retail Box

Images





General	
Form factor:	standard Low Profile
Function:	standard Remote Wake-Up
Specification:	standard RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	standard Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	standard PCIe
Interface	
Connector 1:	standard 1 x PCI Express x1
Connector 2:	standard 1 x Serial RS-232 DB9 male
Technical characteristics	
Chipset:	standard ASIX AX99100
Data transfer rate:	standard up to 230.4 Kb/s
FIFO:	standard 1 x 256 Byte
Operating temperature:	standard 0 °C ~ 55 °C
Humidity:	standard 10 ~ 90 %
Signal transmission:	standard TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
Data transmission:	standard asynchronous Bi-directional
UART:	standard 16C950
Physical characteristics	
Screw type:	standard #4-40 UNC



Slot bracket:	standard
	low profile
	standard
Length:	standard
	6.4 mm
Width:	standard
	72 mm
Height:	standard
	10 mm
Colour:	standard
	green