
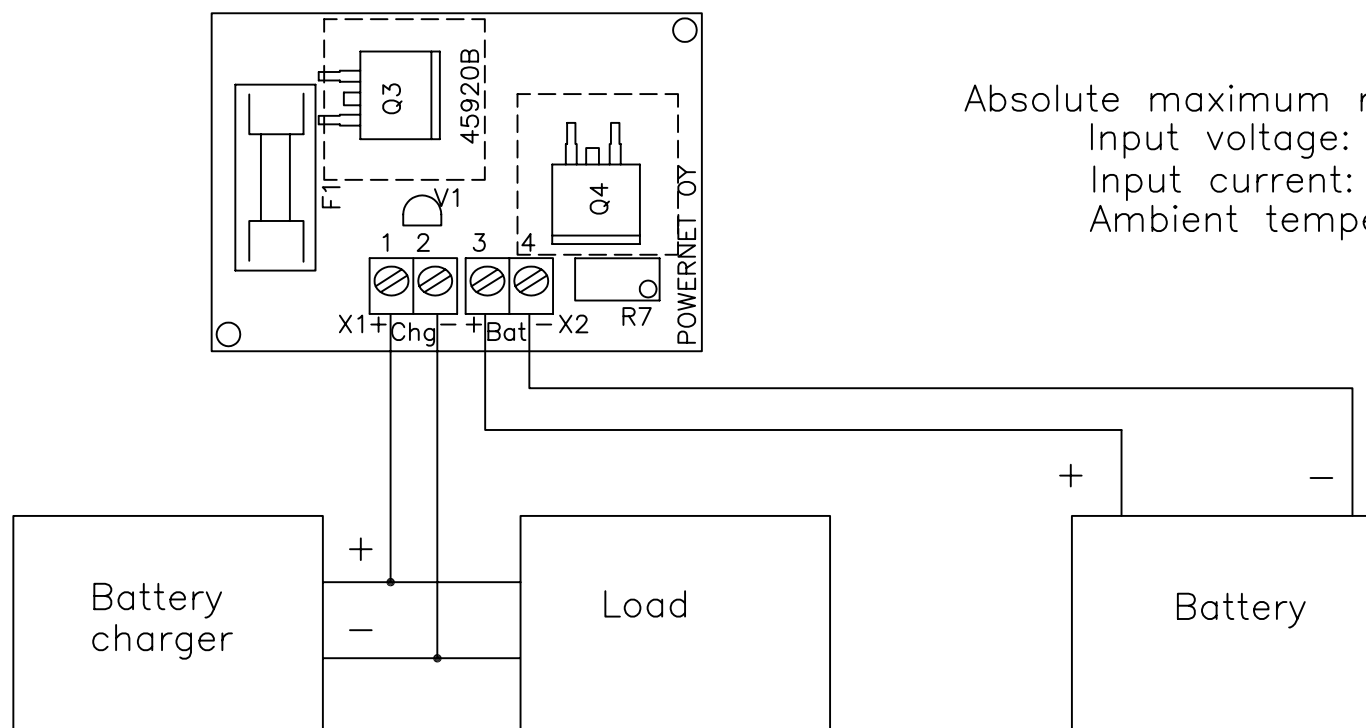


When charger is off, battery voltage can drop to 10V.
Both plus— and minus—line will be open until charger is on—line.



Absolute maximum ratings:
Input voltage: 20VDC
Input current: 10ADC
Ambient temperature: +55°C

Note: The deep discharge protector won't connect batteries to output terminal until mains voltage is present.

 POWERNET	 Sheet 1 of 1	Scale:	F				
		1:1	E				
		SW. AUTOCAD LT	D				
		Ext. DWG	C				
Product SPS4590		Media	B	19.01.05 TSo	19.01.05 TSo	19.01.05 TSo	19.01.05 TAr
Name: CONNECTION		Drawing no: 459c0	A	30.11.98 LPo	11.06.99 LPo	11.06.99 RLi	11.06.99 LPo
		Rev.	Designed	Drawn	Inspected	Approved	