

## Product information

### Floor Standing Cabinets SRS

- Sheet steel housing with welded frame, completely pre-assembled, self ventilated,
- Surface finish: powder painted in RAL 7035 - light grey (other colors on request),
- Protection IP20 in accordance with PN 92/E-08106/EN 60529/IEC 529. (does not apply to brush cable entries),
- Indoor use,
- Cabinets can be arranged in line using line-up bolts after removing side walls (Part No.11190130),
- Cabinet frame fully welded - 1,5 mm thick sheet steel on 4 x leveling feet M10,  
Optionally:
  - plinth standard or with tilt protection
  - cabinet wheel kit - 11190143 (maximum load capacity 150 kg.)
  - heavy duty castor set - (maximum load capacity 500 kg.) for cabinets 600 width - 11190160, and for 800 width - 11190180



- Front door: window made of safety glass (optionally: full steel, full glass, punched perforated plate), opening angle 180 degrees. Left or right door opening options,
- Cabinet rear panel - 1 mm. thick sheet steel, removable with two single point locks (Optionally: full steel or perforated, left or right side mounted door),
- Cabinet side panels - 1 mm thick sheet steel, removable with two single point locks,
- Two pairs of the profile rails (AL-Zn coated) each arranged at the front and rear on the inside. Each profile with unit labeling, Maximum spacing between front and rear profile rails:
  - cabinet depth 600 mm - max 472 mm
  - cabinet depth 800 mm - max 672 mm
  - cabinet depth 900 mm - max 772 mm
- Possibility to increase maximum weight of equipment mounted in the cabinet SRS by using cabinet max load strengthen kit,
- Cables let in entry optionally either from roof or base, either, through top or bottom of the rear side of cabinet, pre-punched opening (Dimensions: 450 x 90 mm),
- In the roof and base of cabinet 2 x 4U blind plates (pre - punched opening) for fan units (possible configurations 1 or 2 x 2 fan units, 1 x 4 fan units, 1 x 6 fan units),
- Wide range of supplementary accessories: plinths, shelves, fan units, light units, power distribution units, blanking covers, cable management accessories etc,
- Optional 19" swing frame 90° opening.

Product information


Floor Standing Cabinets SRS

Internal cabinet sections fully earthed (grounding cords length: 30 cm, 6 mm<sup>2</sup>) to the cabinet bottom.



In 800 mm. width racks its possible to use special heavy duty traverse set – 11130195 to increase max. load capacity.

New profiles fixing system efficiently increased maximum load capacity of the cabinets and facilitate of cables management. Profile rails with 25 mm. hole spacing arranged horizontally at the top and the bottom of the cabinet, for fixing and depth adjustment of the profile rails. Minimum distance from the front door and front profile rails – 95 mm.

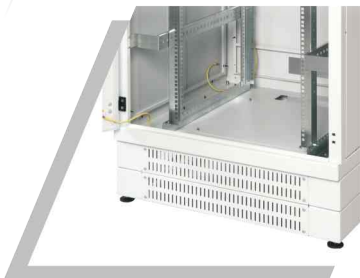

Option to use double 100 mm. plinth.

Front door with single point turning handle with latch, lockable.



Safety glass in front door with additional reinforcement elements.

## Product information

### Floor Standing Cabinets SRS

### Available dimensions

Type	Dimensions [mm]			Weight [kg]	Load capacity [kg]	Index
	Width	Depth	Height			
15U	600	600	780	44	600	11012661.1V
15U	600	800	780	51	600	11012681.1V
15U	800	800	780	60	600	11012881.1V
15U	800	900	780	64	600	11012891.1V
18U	600	600	915	48	600	11013661.1V
18U	600	800	915	56	600	11013681.1V
18U	800	800	915	64	600	11013881.1V
22U	600	600	1095	53	600	11014661.1V
22U	600	800	1095	62	600	11014681.1V
22U	800	800	1095	71	600	11014881.1V
22U	800	900	1095	76	600	11014891.1V
24U	600	600	1210	82	600	11015661.1V
24U	600	800	1210	82	600	11015681.1V
24U	800	800	1210	82	600	11015881.1V
24U	800	1000	1210	82	600	11015811.1V
27U	600	600	1315	60	600	11016661.1V
27U	600	800	1315	69	600	11016681.1V
27U	800	800	1315	80	600	11016881.1V
32U	600	600	1535	73	600	11017661.1V
32U	600	800	1535	87	600	11017681.1V
32U	800	800	1535	88	600	11017881.1V
32U	800	900	1535	102	600	11017891.1V
32U	600	900	1535	108	600	11017691.1V
42U	600	600	1980	88	600	11018661.1V
42U	600	800	1980	105	600	11037501.1V
42U	800	600	1980	103	600	11018861.1V
42U	600	900	1980	110	600	11018691.1V
42U	800	800	1980	121	600	11018881.1V
45U	600	600	2120	92	600	11019661.1V
45U	600	800	2120	109	600	11019681.1V
45U	800	800	2120	127	600	11019881.1V
47U	600	600	2186	100	600	11010661.1V
47U	600	800	2120	115	600	11010681.1V
47U	800	800	2120	130	600	11010881.1V

#### Accessories supplied:

- 1 x brush terminal,
- 1 x set of captive nuts (16 pcs.),
- 2 x keys for sides and rear panels,
- 2 x keys for front door,
- 4 x leveling feet M10,
- 1,5 m of special cable entry cover for cables protection (after re-moving cable entry).

#### Delivery terms:

- Delivery in secure transport carton and stretch packaging on disposable pallet.
- We can supply racks with special design, custom colors, already equipped, other dimensions, locks, door version etc.

# Contact



BKT Elektronik

Export Department

69 Łochowska Str.

86-005 Białe Błota

tel. +48 52 36 36 371, -772, -780

fax. +48 52 36 36 370

e-mail: [export@bkte.pl](mailto:export@bkte.pl)

