

FTTH WALL OUTLET

FTTH WALL OUTLET

FTTH Wandbox
FTTH wall outlet

The FTTH WALL OUTLET is designed for the placement of 2–4 optical fibers for termination of the optical network or for interconnection of optical cables. The distributor can be used for connection of computers, some peripherals and another devices by connecting cables. The distributor is designed for indoor wall mounting. Inputs and outputs can vary by used panels.


- Capacity 4 optical connectors
- Connector holder SC, SC DUPLEX, ST, FC, E2000, LC
- Optical fiber reserve placement
- Easy assembly
- On-wall installation
- Coverage degree IP 20
- Placement up to 6 optical splices



Lightwin®
European Fibre Optic Solutions

TECHNICAL SPECIFICATIONS

Inputs	Micro duct ø 5 mm, Micro duct ø 3 mm, Optical cable maximum ø 5 mm
Outputs	Adapters SC, SC DUPLEX, ST, FC, E2000, LC
Coverage degree	IP 20 to EN 60529
Self-extinguishing degree	VO according to UL 94
Impact protection degree	IK 04 to EN 50102
Colour	Light grey RAL 7035
Material	PC/ABS
Dimensions	140 × 109 × 23 mm
Weight	0.1 kg

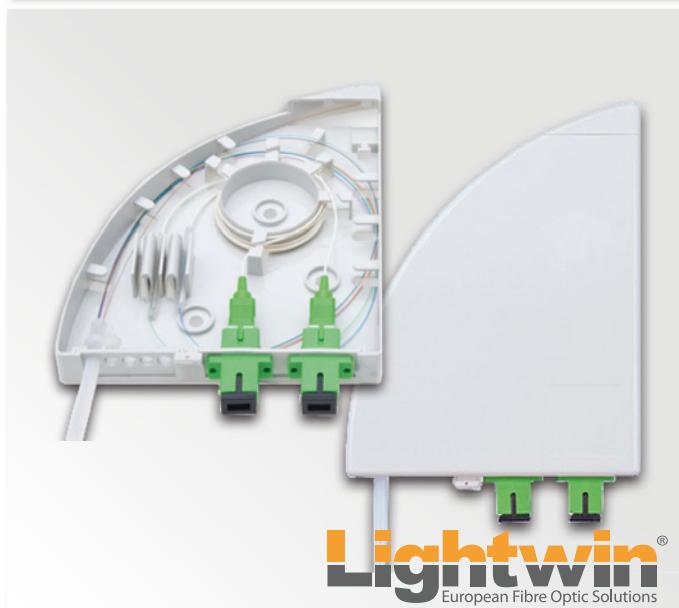

Lightwin®
European Fibre Optic Solutions


Beschreibung / Description

FTTx Hausanschlussbox
Einbaumöglichkeit für 2x Kupplungen (SC, Duplex SC, ST, FC, E2000, LC).
Empfehlung: Verwenden Sie Pigtaile mit G.657.A Faser!

FTTx wall distribution box, capacity for 2 connectors (SC, Duplex SC, ST, FC, E2000, LC), Suggestion: Use G.657.A pigtails

Artikelnummer / Part number

FTTH WALL OUTLET

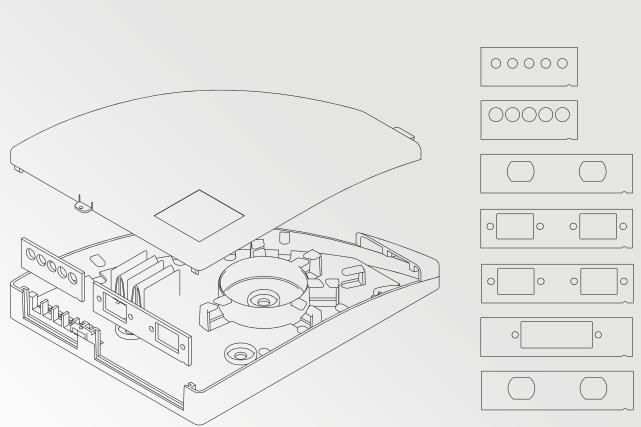

Lightwin®
European Fibre Optic Solutions