


# Pro Base PB690L (RG6 type)

## CABLE CROSS-SECTIONS



CABLE ILLUSTRATION

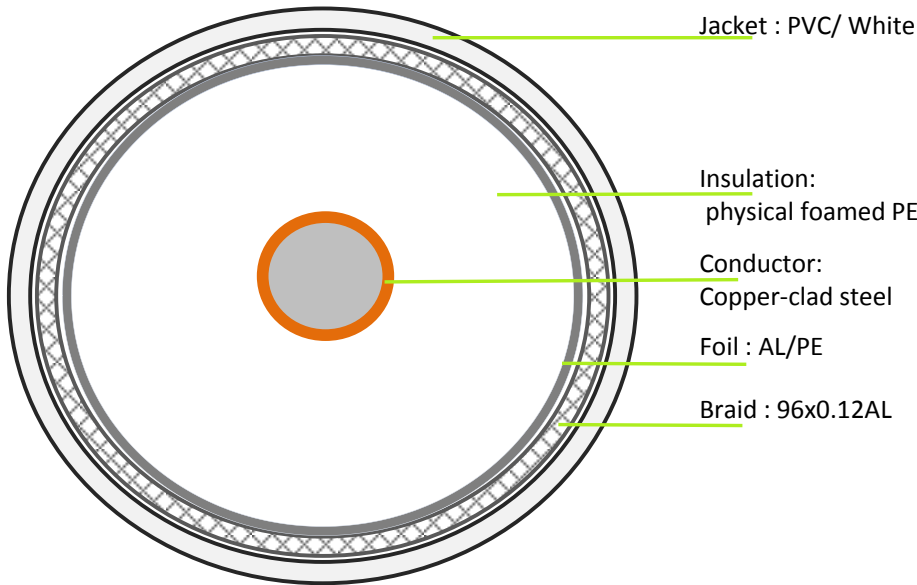

CABLE PACKING- 100m

### Cabling Application:

Suitable for RF signal transmission , CATV, MATV,  
CATV, HDTV, Digital video, FM broadcast

### Cable construction:

Conductor: Copper-clad steel 1.02mm  
Insulation Material: Foam PE  
Braid : 96x0.12mm Aluminium  
Foil: AL/PE  
Jacket: PVC 6.8mm

### Standards:

EN 55022:2010, EN 55024:2010,  
EN 61000-3-2:2006+A2:2009,  
EN 61000-3-3:2008  
CE mark  
RoHS Compliance

### Packing:

Roll -100m, Weight (aprox) -4.2kg

Frequency MHz	Attenuation dB/100m
50	5.59
175	7.38
470	12.07
862	17.23
1000	18.57
2150	28.84
2300	31.87