


Printing: CAT.6 U/UTP FLAT PATCH CABLE 250 MHz
 4PAIRS ISO/IEC 11801 & EN50173-1 &
 ANSI/TIA-568-C.2 ## 815 ##

Spezifikation / Specification	CAT 6
Kabeltyp / Cable type	Flachkabel / flat cable
Innenleiter, Material / Inner conductor material	CU (Kupfer) / CU (copper)
Innenleiter, Aderdurchmesser / Inner conductor, core diameter	(7/0.08 ± 0.007 mm)
AWG	32/7 (stranded)
Schirmungsklasse / Shielding class	U/UTP
Kabelmantel, Material / Material cable sheath	PVC
Höhe Kabelmantel / Height of cable sheath	1.45 ± 0.01 mm
Breite Kabelmantel / Width of cable sheath	6.05 ± 0.01 mm
Knickschutz / Kink protection	beidseitig / both sides
Anschluss, Typ / Connection, type	RJ45-Stecker (8P8C) / RJ45 male (8P8C)
Anschluss 2, Typ / Connection 2, type	RJ45-Stecker (8P8C) / RJ45 male (8P8C)
Anschluss, Schirmung / Connection, shielding	nein / no
Rastnasenschutz / Latch protection	nein / no
max. Bandbreite / max. bandwidth	250 MHz

Farbe / Colour	Art.	L [m]
schwarz / black	95379	0.50
	95380	1.00
	95382	1.50
	95384	2.00
	95386	3.00
	95387	5.00
dunkelbraun / darkbrown	95388	7.00
	95381	10.00
	95383	15.00
	95385	20.00
	95889	0.50
	95890	1.00
weiß / white	95892	1.50
	95894	2.00
	95896	3.00
	95897	5.00
	95898	7.00
	95891	10.00
95893	15.00	
95895	20.00	
95150	0.50	
95151	1.00	
95192	1.50	
95152	2.00	
95153	3.00	
95154	5.00	
95155	7.00	
95156	10.00	
95157	15.00	
95158	20.00	

Farbe / Colour	Art.	L [m]
hellbraun / lightbrown	95879	0.50
	95880	1.00
	95882	1.50
	95884	2.00
	95886	3.00
	95887	5.00
blau / blue	95881	10.00
	95883	15.00
	95885	20.00
	96395	0.50
	96401	1.00
	96407	1.50
gelb / yellow	96413	2.00
	96419	3.00
	96426	5.00
	96396	0.50
	96402	1.00
	96408	1.50
rot / red	96414	2.00
	96420	3.00
	96400	1.00
	96406	1.50
	96412	2.00
	96418	3.00
orange	96403	1.00
	96409	1.50
	96415	2.00

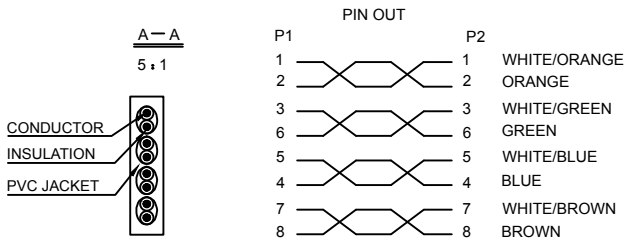

CAT 6 Flach-Patchkabel, U/UTP

- ideal um hinter Fußleisten, unter Teppichen oder anderen Fußböden verlegt zu werden
- ungeschirmtes LAN/Netzwerkabel zum Anschluss Ihrer Netzwerkkomponenten mit 2x RJ45 Steckern
- geringer Biegeradius, extrem flexibel, ideal hinter Fußleisten platzsparend zu verlegen
- Außenmaß nur 1,5 x 6 mm
- mit vergoldeten Kontaktflächen (PINs)
- kurzer Steckertyp ohne Rastnasenschutz
- Slimline-Knickschutztüle
- Paarfolge nach EIA/TIA 568B

CAT 6 Flat-patch cable, U/UTP

- ideal to behind baseboards to be laid under carpets or other floor
- unshielded LAN/network cable to connect network components with 2 x RJ45 connectors
- low bending radius, extremely flexible, ideal to move to save space behind baseboards
- OD only 1.5 x 6 mm
- with gold plated PINs
- short connector type without latch protection
- on strain relief
- pair-sequence acc. to EIA/TIA 568B



Änderungen

Datum	Name	gez.:	Datum	Name	Bezeichnung	Blatt
		gez.:	27.08.2020	sm	CAT FLAT 6-xxxx U/UTP	
		gepr.:	27.08.2020	ac	x.xx m	
		Norm:			Zeichnungs-Nr.:	von
		Änderungen vorbehalten / Subject to change			95150ff	

