




Delock SMA jack panel-mount 2 prepunched holes for mounting

Description

This jack by Delock is suitable for connecting components of radio frequency technology.

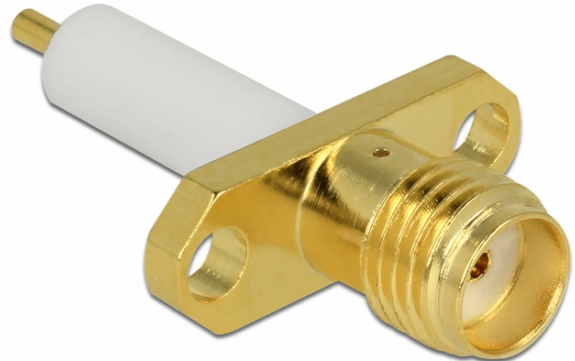

Specification

- Connector: 1 x SMA jack
- Impedance: 50 Ohm
- VSWR: 1.5
- Housing: brass gold plated
- Operating temperature: -65 °C ~ 165 °C
- Thread type: M2.6
- Dimensions (LxWxH): ca. 25.2 x 16.0 x 5.7 mm

System requirements

- Device with a free SMA connector

Package content

- SMA Jack

Item no. 65846

EAN: 4043619658466

Country of origin: China

Package: Zip poly bag



Interface	
connector:	standard 1 x SMA jack
Technical characteristics	
Impedance:	standard 50 Ω
Operating temperature:	standard -65 °C ~ 165 °C
VSWR:	standard 1.5
Physical characteristics	
Housing material:	standard Brass gold plated
Length:	standard 25.2 mm
Width:	standard 16.0 mm
Height:	standard 5.7 mm
Thread type:	standard 1/4" - 36 UNS - 2A
Pin:	standard Brass gold plated