



Delock VGA15 female to Terminal Block Adapter with Enclosure

Description


This terminal block adapter by Delock can be used to connect bare wires. Thus the adapter is not only convenient for special industry applications, but also for the hobby area, e.g. railway modelling.

Protection by enclosure

The plastic enclosure protects the PCB from dirt and damage.

Strain relief

The integrated strain relief fixes the cable in the enclosure.

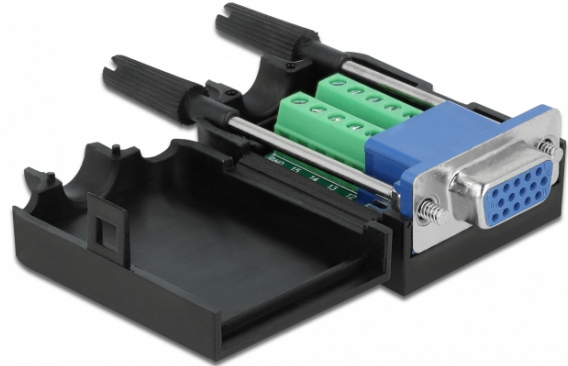

Specification

- Connectors:
 - 1 x VGA 15 pin female with screws
 - 1 x 10 pin terminal block
- Pitch: 3.81 mm
- Useable for a cable gauge from 26 to 18 AWG
- Operating temperature: -20 °C ~ 105 °C
- Dimensions (LxWxH): ca. 51.8 x 34.4 x 21.0 mm

Item no. 66259

EAN: 4043619662593

Country of origin: CHINA

Package: Zip poly bag

System requirements

- A free VGA interface

Package content

- Adapter
- 1 x strain relief
- 2 x locking screws

Images





Interface	
Connector 1:	standard 1 x VGA 15 pin female
Connector 2:	standard 1 x 10 pin terminal block
Technical characteristics	
Operating temperature:	standard -20 °C ~ 105 °C
Physical characteristics	
Pitch distance:	standard 3.81 mm
Conductor gauge:	standard 26 - 18 AWG
Length:	standard 51.8 mm
Width:	standard 34.4 mm
Height:	standard 21.0 mm