

Delock WLAN 802.11 ac/a/b/g/n Antenna RP-SMA 2 dBi omnidirektional fixed waterproof

Description

This wireless LAN antenna by Delock can be connected to a device with RP-SMA interface, in order to send and receive signals.



RP-SMA

Specification

- Connector: RP-SMA plug
- Frequency range:
2.4000 - 2.4835 GHz
5.1500 - 5.8250 GHz
- Antenna gain: 2 dBi
- Impedance: 50 Ohm
- Polarisation: vertical
- VSWR: 2
- Operating temperature: -20 °C ~ 65 °C
- Colour: black
- Antenna length: 17,8 cm
- Antenna diameter:
6.0 mm (top)
13.0 mm (body)
12.5 mm (RP-SMA)

Item no. 88397

EAN: 4043619883974

Country of origin: Taiwan, Republic of China

Package: Poly bag


System requirements

- Device with a free RP-SMA jack

Package content

- WLAN antenna

Images

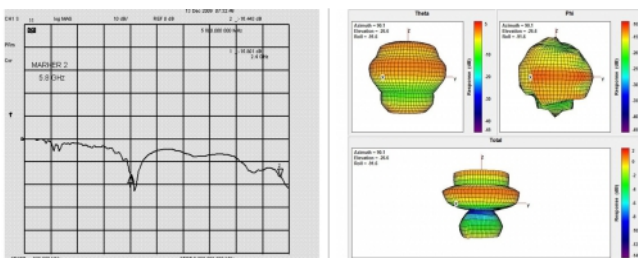

Interface	
connector:	standard 1 x RP-SMA plug
Technical characteristics	
Frequency range:	standard 2.4000 - 2.4835 GHz 5.1000 - 5.8250 GHz
Antenna gain:	standard 2 dBi
Operating temperature:	standard -20 °C ~ 65 °C
Polarisation:	standard linear vertical
VSWR:	standard 2.0
Physical characteristics	
Antenna type:	standard omnidirectional
Housing material:	standard TPEE
Diameter:	standard 13.0 mm
Length:	standard 17.8 cm
Diameter connector:	standard 12.5 mm
Colour:	standard black