

Delock WLAN 802.11 ac/a/h/b/g/n Antenna RP-SMA plug 7.5 - 10 dBi directional with tilt joint black

Description

This Wireless LAN antenna can be connected to a WLAN device with RP-SMA interface, in order to send and receive signals.



RP-SMA

Specification

- Connector: RP-SMA plug
- Frequency range:
2.4000 - 2.4835 GHz
5.1500 - 5.8750 GHz
- Antenna gain: 7.5 - 10 dBi
- Impedance: 50 Ohm
- Polarisation: linear, vertical
- Power handling: max. 1 W
- VSWR: 2.0
- Operating temperature: -10 °C ~ 55 °C
- Colour: black
- Dimensions (LxWxH): ca. 167.30 x 66.00 x 18.00 mm
- Diameter: ca. 13.50 mm (RP-SMA)

Item no. 88904

EAN: 4043619889044

Country of origin: Taiwan, Republic of China

Package: Poly bag




System requirements

- Device with a free RP-SMA jack

Package content

- WLAN antenna

Images

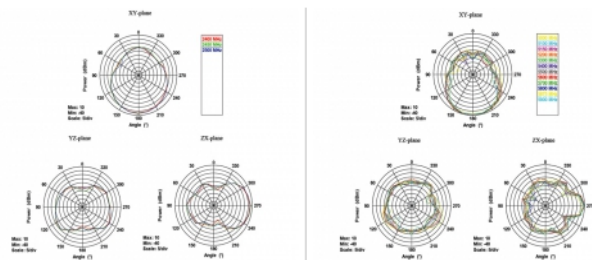

It's front side (the transmitter)

Vertical the connector

Interface	
connector:	standard RP-SMA plug
Technical characteristics	
Frequency range:	standard 2.4000 - 2.4835 GHz 5.1500 - 5.8750 GHz
Gain:	standard 7.5 - 10 dBi
Impedance:	standard 50 Ω
Operating temperature:	standard -10 °C ~ 55 °C
Polarisation:	standard linear vertical
Power handling:	standard 1 W
VSWR:	standard 2.0
Physical characteristics	
Length:	standard 167.30 mm
Width:	standard 66.00 mm
Height:	standard 18.00 mm
Diameter connector:	standard 13.50 mm
Colour:	standard black