
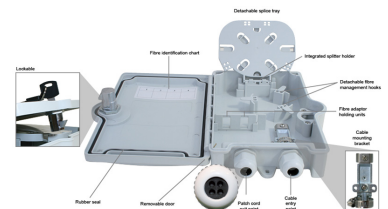



## W25 Indoor/Outdoor Distribution Box

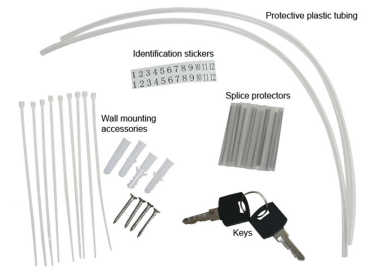

This Lockable IP65 distribution box offers the ability to terminate 4 fibers housed in a strong robust ABS enclosure for indoor and outdoor applications. With the ability to use SC Simplex and LC Duplex adapter types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibers. In addition to the interchangeable adapters the enclosure also offers up to 4 exit points for patching cables and 1 standard cable entry point for loose tube, tight buffer, pre-terminated and steel tape armored cable. Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front door allowing for quick and easy installation.

## FEATURES/BENEFITS

- Up to 4 fibers
- Removable splice tray for easy installation
- Multiple adapter options available
- 2 adapter positions
- IP 65
- Accepts loose tube, distribution and pre terminated cables
- Integrated bend radius protection
- Sealing glands for up to 4 exiting cables + 1 incoming cable
- Lockable door
- Removable door for ease of installation
- RoHS, REACH SvHC
- Supplied with 4 heatshrink splice protectors
- Supplied with transit tubing
- Supplied with wall fixings and tie wraps

## APPLICATIONS

- Data centers, premise installations, telecommunication networks
- Ethernet, Fiber Channel, ATM, LAN, MAN and WAN
- Data communication and telecommunication networks
- Indoor/Outdoor applications

## SPECIFICATIONS

## PRODUCT SPECIFICATION

Height	210mm
Width	156mm
Depth	48mm
Net weight	0.51kg
Packed weight	0.59kg
Packaged dimensions	215(H) x 157(W) x 60(D)mm
IP rating	IP65
Suitable for adapter type	SC Simplex LC Duplex
Number of fibers	2 to 4*
Number of ports	2
Cable entry 20mm	1
Cable exit 20mm	1
Material	ABS
Colour	White
Operating temperature	-40°C to +60°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754,
Compliant to	RoHS, Reach/SVHC

\*LC Duplex must be used when installing more than 2 fibers

**ORDERING INFORMATION**

PART NUMBER	DESCRIPTION	LEGACY PART NUMBER
FXWCXXDXXX-25XX	IP Rated Wall Box Grey 7035 IP65 2 Port (SCS/LCD) with 2x 25mm + 2x 26mm Glands UNLOADED W25XXX00	W25XXX00



SCAN QR FOR PRODUCT PAGE

**FURTHER INFORMATION**

- For additional information please contact your sales representative
- To view the product 360 visit the product page (Scan the QR code or visit the link below)
- Downloaded from <https://www.aflhyperscale.com/product/w25-indoor-outdoor-distribution-box>
- AFL Hyperscale reserves the right to make changes in this datasheet at any time without notice
- Information in this document is correct as of September 16, 2019

**Europe**

+44 (0) 1908 441 144  
 emeasales@aflhyperscale.com  
 © AFL Hyperscale 2019

**Americas**

+1 866 814 8615  
 usasales@aflhyperscale.com

**Middle East & Africa**

+971 4 404 9606  
 mesales@aflhyperscale.com

**India**

+91 80 46874687  
 indiasales@aflhyperscale.com

**Asia Pacific**

+86 755 2561 3694  
 apacsales@aflhyperscale.com