



Delock Sub-D9 male to Terminal Block Adapter with Enclosure

Description


This terminal block adapter by Delock can be used to connect bare wires. Thus the adapter is not only convenient for special industry applications, but also for the hobby area, e.g. railway modelling.

Protection by enclosure

The plastic enclosure protects the PCB from dirt and damage.

Strain relief

The integrated strain relief fixes the cable in the enclosure.

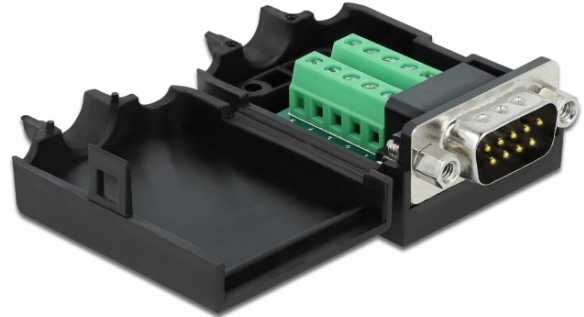

Specification

- Connectors:
 - 1 x serial Sub-D 9 male with nuts
 - 1 x 10 pin terminal block
- Pin assignment: 1:1
- Pitch: 3.81 mm
- Useable for a cable gauge from 26 to 18 AWG
- Operating temperature: -20 °C ~ 105 °C
- Dimensions (LxWxH): ca. 51.8 x 34.4 x 21.0 mm

System requirements

- A free Sub-D 9 pin female

Package content

- Adapter
- 1 x strain relief
- 2 x locking screws

Item no. 66264

EAN: 4043619662647

Country of origin: CHINA

Package: Zip poly bag

Images





Interface	
Connector 1:	standard 1 x serial Sub-D 9 male with nuts
Connector 2:	standard 1 x 10 pin terminal block
Technical characteristics	
Operating temperature:	standard -20 °C ~ 105 °C
Physical characteristics	
Pitch distance:	standard 3.81 mm
Conductor gauge:	standard 26 - 18 AWG
Length:	standard 51.8 mm
Width:	standard 34.4 mm
Height:	standard 21.0 mm