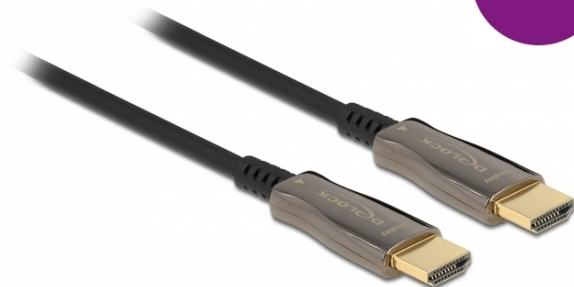


# Delock Active Optical Cable HDMI 8K 60 Hz 20 m

## Description

This cable by Delock is used to connect devices with a HDMI interface, such as monitors or TVs, to a PC or a laptop. This active optical cable is particularly thin and can transmit signals without loss over longer distances.

**8K****20 m**

## Specification

- Connectors:
  - 1 x HDMI-A male >
  - 1 x HDMI-A male
- High Speed HDMI specification
- Fibre optical cable with low signal degradation
- Not affected by electromagnetic interference
- Cable diameter: ca. 5.4 mm
- Contacts gold-plated
- Fixed signal direction
- Transmission of audio and video signals
- Data transfer rate up to 48 Gbps
- Resolution up to 7680 x 4320 @ 60 Hz (depending on the system and the connected hardware)
- Supports HDR
- Supports HDCP 1.4 and 2.2
- Colour: black
- Length incl. connectors: ca. 20 m

## System requirements

- A free HDMI interface

## Package content

- HDMI cable

## Item no. 84038

EAN: 4043619840380

Country of origin: China

Package: White Box



|                               |                                        |
|-------------------------------|----------------------------------------|
| General                       |                                        |
| Specification:                | <b>standard</b><br>High Speed HDMI     |
| Interface                     |                                        |
| Connector 1:                  | <b>standard</b><br>1 x HDMI-A male     |
| Connector 2:                  | <b>standard</b><br>1 x HDMI-A male     |
| Technical characteristics     |                                        |
| Data transfer rate:           | <b>standard</b><br>48 Gb/s             |
| Maximum screen resolution:    | <b>standard</b><br>7680 x 4320 @ 60 Hz |
| Physical characteristics      |                                        |
| Cable colour:                 | <b>standard</b><br>black               |
| Cable diameter:               | <b>standard</b><br>5.4 mm              |
| Cable length incl. connector: | <b>standard</b><br>20 m                |
| Smallest bending radius:      | <b>standard</b><br>20 mm               |