




Delock PCI Express x4 Card to 1 x internal SFF-8643 NVMe - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by one SFF-8643 interface. It can be connected to e.g. one **SSD with U.2 interface** by using an optional cable.

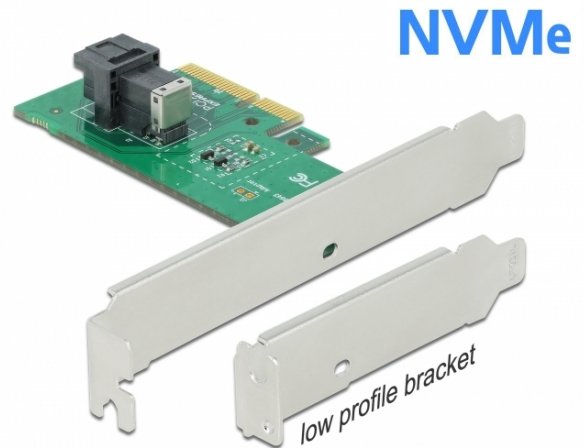

Specification

- Connectors:
 - 1 x SFF-8643 female
 - 1 x PCI Express x4, V4.0
- Data transfer rate up to 64 Gbps
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- 1 x LED indicator
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

System requirements

- Linux Kernel 3.18 or above
- Windows Server 2016
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- User manual

Item no. 90437

EAN: 4043619904372

Country of origin: China

Package: White Box

Images





General	
Function:	standard Bootable, ex UEFI 2.3.1 NVM Express (NVMe)
Supported operating system:	standard Linux Kernel 3.18 or above Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2016
LED indicator:	standard 1 x
Interface	
Internal:	standard 1 x 36 pin SFF-8643 female 1 x PCI Express x4, V4.0
Technical characteristics	
Operating temperature:	standard 5 °C ~ 50 °C