

Product Information

SRS server cabinet, BKT 42U, 800/1000/1980 (W/D/H [mm]), metal/glass front door, full metal back door, RAL 7035 GREY, "BOX" (welded frame - capacity 1000 kg)

Card Number: PI_SSR54280102711.1_01.24



* sample photo

Standards

PN-EN 60297-3-100:2009-02, IEC 60297-100-3:2008-11, RoHS 2011/65/EU

Application

Server rooms, distribution points and telecommunications nodes in industry, public institutions or public buildings.

Features

- Stable welded frame,
- Three point lock secured with a key code 1333 as standard,
- Two pairs of mounting profiles as standard,
- Additional horizontal traverses ensuring rigidity,
- The ability to change the direction of door opening to the right/left,
- Dismantled side walls secured with a key code 1333 as standard,
- All disconnectable elements have earthing lines,
- Dedicated place for the installation of the BKT earthing strip,
- The possibility of setting and screwing cabinets into rows,
- 6 cable slots to break out in the roof and floor (4x 2U and 2x 4U),
- Starter kit included as standard (16x screws M6 with washers and nuts, 1x cable grommet, 1.5 m edge protection),
- 4 leveling feet for the cabinet in the range of 20 mm as standard,
- Mounting profiles with permanent numbering of the U mounting height as standard,
- The possibility of moving the mounting profiles front/rear every 25 mm,
- Door opening angle above 180°,
- Painting in powder technique ensuring durability of the product.

Product Information

SRS server cabinet, BKT 42U, 800/1000/1980 (W/D/H [mm]), metal/glass front door, full metal back door, RAL 7035 GREY, "BOX" (welded frame - capacity 1000 kg)

Card Number: PI_SSRS4280102711.1_01.24

Product characteristics

- Construction: welded
- Material: steel sheet
- Front door: metal/glass
- Back door: full metal
- Side walls: sheet metal
- Load capacity: 1000 kg
- IP rating: 20
- Weight: 120 kg
- Color: RAL 7035

Performance / Variants

Type	Width [mm]	Depth [mm]	Height [mm]	Index
42U	800	1000	1980	SSRS4280102711.1

Optional accessories

Index	Name
11070810.1	BKT plinth/base 100 mm, for cabinet width 800 and depth 1000 mm - RAL 7035 GREY
11126420.1	BKT vertical cable management panel/organiser BKT 42U RAL 7035 GREY
24011420.TLS	BKT ventilation panel 4x fan, roof/rack mounted + thermostat 1U RAL 7035 GREY
11111125.1V	BKT fixed shelf 19", 1U, depth 250 mm, mounted on the front RAL 7035 GREY
11111165.1V	BKT fixed shelf 19", 1U, depth 650 mm, mounted at 4 points RAL 7035 GREY
11140775	BKT filtration panel, roof/rack mounted (1 filter/insert included), 8U
11140221	BKT metal cable organiser 19" - with metal ears RAL 7035 GREY 1U
11140130	BKT metal cable organiser 19" - with plastic ears RAL 7035 GREY 1U
11140851	Cable grommet/cable entry with brush for standing BKT cabinets (1 pc.) 90/450 mm
11090015	M6 cage nut & rack screw set (20x screws M6 + washers + floating nuts)
11190130	Line-up bolts set BKT SRS (cabinet joining kit)
11140231	BKT blanking panel 1U RAL 7035 GREY
11140141	BKT blanking panel 2U RAL 7035 GREY
11160032	BKT earthing kit







Product Information

SRS server cabinet, BKT 42U, 800/1000/1980 (W/D/H [mm]), metal/glass front door, full metal back door, RAL 7035 GREY, "BOX" (welded frame - capacity 1000 kg)

Card Number: PI_SSRS4280102711.1_01.24

Construction

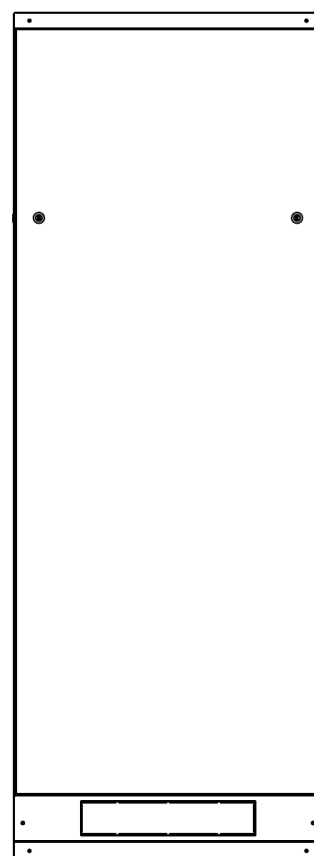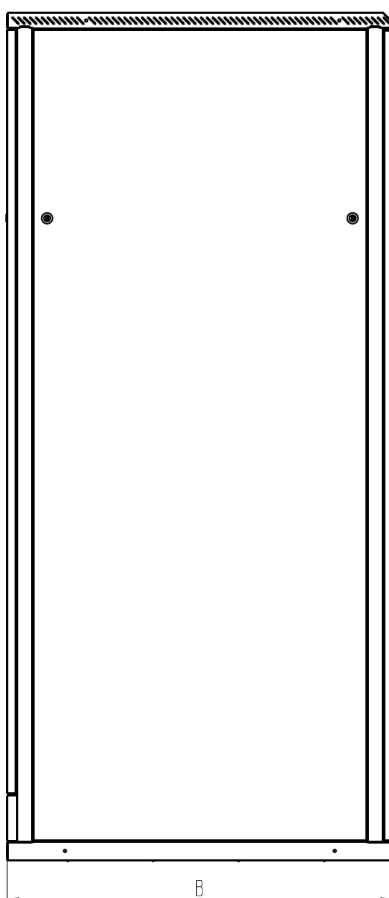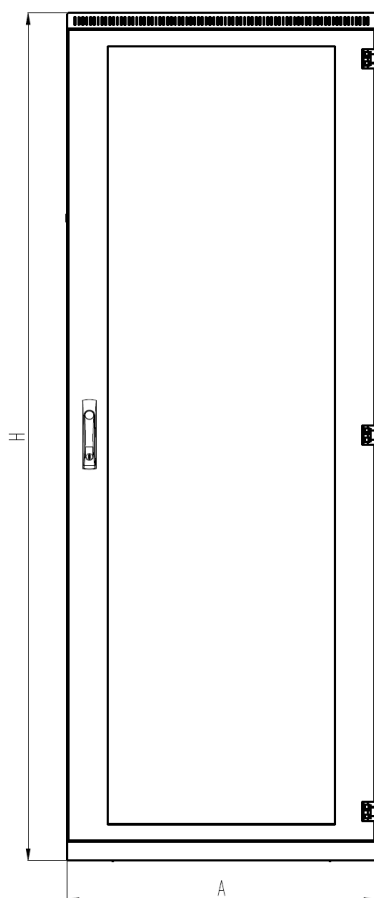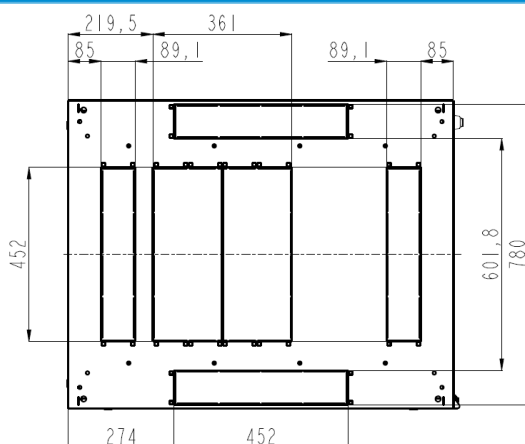

Measurement A [mm]	Measurement B [mm]	Measurement C [mm]
Width	Depth	Height
800	1000	1980