


Delock Riser Card PCI Express x1 > 4 x PCIe x16 with 60 cm USB cable

Description

The PCI Express riser card by Delock can be plugged into any PCI Express x1 slot on the motherboard. The PCI Express board can be mounted in a different position in the case. This allows up to four graphics cards to be operated in each PCIe slot of a motherboard, even if the graphics cards are wider than a single slot. By using several riser cards, several graphics cards can be operated simultaneously on one motherboard, e.g. for mining crypto currencies such as Bitcoin, Ethereum or Zcash.

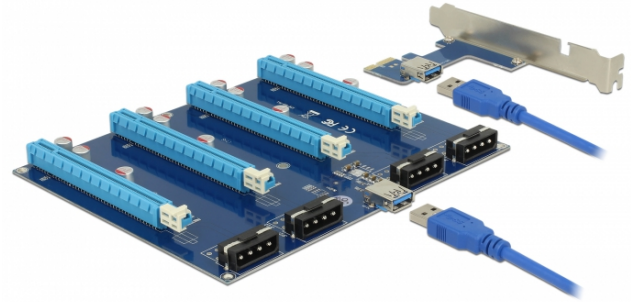

Note

The package content includes a USB 3.0 riser cable with a length of 60 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.

Special features

Four PCIe x16 graphics cards can be used with a PCIe x1 slot.

Specification

- Connectors:
 - Motherboard side:
 - 1 x PCI Express x1
 - 1 x USB 3.0 Type-A female
 - Riser side:
 - 4 x PCI Express x16 slot
 - 1 x USB 3.0 Type-A female
 - 4 x Molex 4 pin power plug
- Chipset: Asmedia ASM1184e
- Data transfer rate up to 800 MB/s
- FP solid capacitors, ensures secure power supply of the graphics card
- 6 x mounting holes on the riser card
- Cable data:
 - 1 x riser cable USB 3.0 Type-A male to male ca. 60 cm (incl. connectors)
 - 2 x power cable 6 pin to SATA ca. 20 cm (incl. connectors)
- Dimensions of the riser card (LxWxH): ca. 175 x 142 x 14 mm

System requirements

- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- Power supply with free SATA power connectors

Package content

- PCIe to USB riser card
- USB to PCIe riser card
- 1 x USB 3.0 cable
- 2 x Power cable


Item no. 41427

EAN: 4043619414277

Country of origin: China

Package: Retail Box

Images



General

Supported operating system: **standard**
OS independent, no driver installation necessary

Interface

connector 1: **standard**
1 x PCI Express x1

connector 2: **standard**
2 x USB 3.0 Type-A female

connector 3: **standard**
4 x PCI Express x16 slot

connector 4: **standard**
4 x Molex 4 pin power plug