


Delock External Enclosure M.2 SSD 42/60/80 mm > SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female toolless

Description

This enclosure by Delock enables the installation of an M.2 SSD in 2280, 2260 and 2242 format, it can be connected via USB to the PC or laptop.

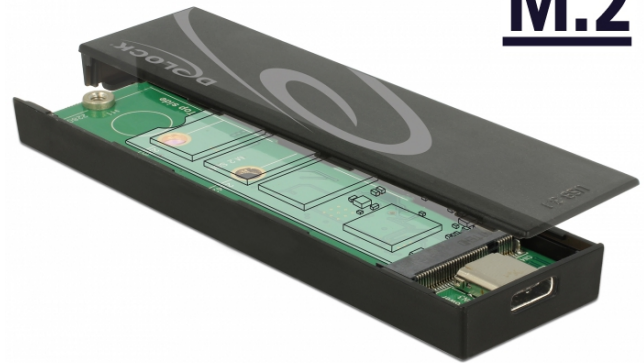

Specification

- Connectors:
 - external: 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
 - internal: 1 x 67 pin M.2 key B slot
- Chipset: Asmedia ASM1351
- Supports M.2 modules in format 2280, 2260 and 2242 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- Data transfer rate up to 6 Gbps
- LED indicator for power and access
- Maximum power for modules: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Hot Plug, Plug & Play
- Dimensions (LxWxH): ca. 102 x 28 x 10 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.4.x
- PC or laptop with a free USB Type-A port

Package content

- External enclosure M.2
- Mounting material
- Cable USB 3.1 Type-A to USB-C™, length ca. 40 cm
- User manual


Item no. 42597

EAN: 4043619425976

Country of origin: Taiwan, Republic of China

Package: Retail Box

Images



General	
Function:	standard Hot Plug Plug & Play
Supported operating system:	standard Linux ex Kernel 4.4.x Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Supported module:	standard M.2 modules in format 2280, 2260 and 2242 with key B or key B+M based on SATA
Maximum height of the components on the module:	standard 1.35 mm application of double-sided assembled modules supported
Interface	
External:	standard 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
Internal:	standard 1 x 67 pin M.2 key B slot
Technical characteristics	
Chipset:	standard Asmedia ASM1351
Data transfer rate:	standard 6 Gb/s
Physical characteristics	
Housing material:	standard Plastic
Length:	standard 102 mm
Width:	standard 28 mm
Height:	standard 10 mm
Colour:	standard black