

Delock WLAN 802.11 b/g/n Antenna RP-SMA plug 5 dBi omnidirectional with tilt joint black

Description

This Wireless LAN antenna can be connected to a WLAN device with RP-SMA interface, in order to send and receive signals.



RP-SMA

Specification

- Connector: RP-SMA plug
- Frequency range: 2.400 - 2.500 GHz
- Antenna gain: 5 dBi
- Impedance: 50 Ohm
- Polarisation: linear, vertical
- VSWR: 2.0
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS
- Colour: black
- Length:
 - ca. 200.30 mm (with tilt joint)
 - ca. 167.80 mm (without tilt joint)
- Diameter:
 - ca. 6.00 mm (top)
 - ca. 13.20 mm (RP-SMA)

System requirements

- Device with a free RP-SMA jack

Package content

- WLAN antenna



Item no. 88396

EAN: 4043619883967

Country of origin: Taiwan, Republic of China

Package: Retail Box

Images

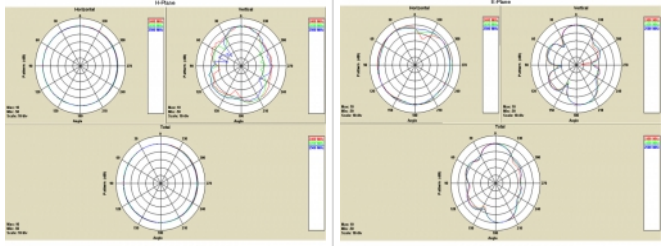

Interface	
connector:	standard RP-SMA plug
Technical characteristics	
Frequency range:	standard 2.400 - 2.500 GHz
Gain:	standard 5 dBi
Impedance:	standard 50 Ω
Operating temperature:	standard -10 °C ~ 55 °C
Polarisation:	standard linear vertical
VSWR:	standard 2.0
Physical characteristics	
Housing material:	standard ABS
Diameter connector:	standard 13.20 mm
Length with tilt joint:	standard 200.30 mm
Length without tilt joint:	standard 167.80 mm
Colour:	standard black