


Delock PCI Express Card to 1 x Serial with voltage supply ESD protection

Description

The PCI Express card by Delock expands a PC by **one external serial port**. Connected devices can be optionally supplied with a **voltage of 5 V or 12 V**. By using the included **low profile bracket**, the PCI Express card can be also installed into a Mini-PC.

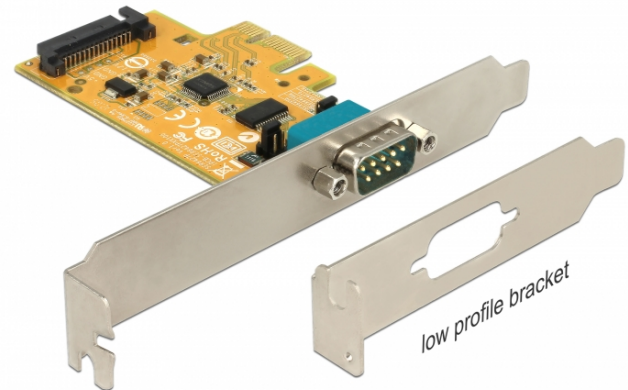

Specification

- Connectors:
external:
1 x serial RS-232 DB9 male
internal:
1 x PCI Express x1, V2.0
1 x SATA 15 pin plug
- Chipset: SUN2212
- Data transfer rate up to 115.2 Kbps
- FIFO: 128 byte
- Compatible with 16C950 UART
- ±15 kV ESD protection for all serial signals meets IEC1000-4-2 standard
- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V
- 5 V or 12 V can be set individually through the jumper (pin 1 or 9)
- Windows WHQL certified

System requirements

- Linux Kernel 2.6.x or above
- Windows Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot
- Power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual


Item no. 90293

EAN: 4043619902934

Country of origin: China

Package: Retail Box

Images



General

Specification: **standard**
RS-232 (EIA / TIA)
PCI Express 2.0

Supported operating system: **standard**
Windows 7 32-bit
Windows 7 64-bit
Windows 8.1 32-bit
Windows 8.1 64-bit
Windows 10 32-bit
Windows 10 64-bit
Windows Server 2008 R2
Windows Server 2012 R2
Windows Server 2012
Windows Server 2016
Linux Kernel 2.6 or above

Interface

External: **standard**
1 x serial RS-232 DB9 male

Internal: **standard**
1 x SATA 15 pin male
1 x PCI Express x1, V2.0

Technical characteristics

Data transfer rate: **standard**
115.2 Kb/s

FIFO: **standard**
128 byte

Voltage: **standard**
5 V or 12 V can be set individually for each port through the jumper (pin 1 or 9)
Power over System (POS)

UART: **standard**
16C950

Physical characteristics

Slot bracket: **standard**
low profile
standard