


Delock LTE Antenna SMA plug 5 - 7 dBi fixed omnidirectional with mounting base and connection cable RG-58 3 m wall mount outdoor black

Description

This antenna by Delock allows the usage of different LTE bands indoors and outdoors.

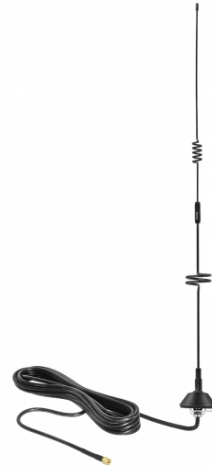

Specification

- Connector: 1 x SMA plug
- Frequency range:
 - 698 MHz - 960 MHz
 - 1710 MHz - 2170 MHz
 - 2500 MHz - 2700 MHz
- ZigBee, LoRa, DECT, Z-Wave, NB-IoT, Bluetooth, GSM, UMTS, LTE, ISM, WLAN 2.4 GHz
- Antenna gain: 5 - 7 dBi
- Impedance: 50 Ohm
- VSWR: 1.5
- Polarisation: linear, vertical
- Operating temperature: -20 °C ~ 70 °C
- Housing material: metal
- Colour: black
- Protection class: IPx5
- Colour: black
- Cable: coaxial
- Cable type: RG-58
- Cable colour: black
- Cable attenuation: 0.6 dB @ 1 GHz per meter
- Cable diameter: ca. 4.95 mm
- Cable length incl. connector: ca. 3 m
- Dimensions (LxD): ca. 56.3 x 4.5 mm

System requirements

- Device with a free SMA connector

Package content

- Antenna


Item no. 12582

EAN: 4043619125821

Country of origin: China

Package: Box

Images

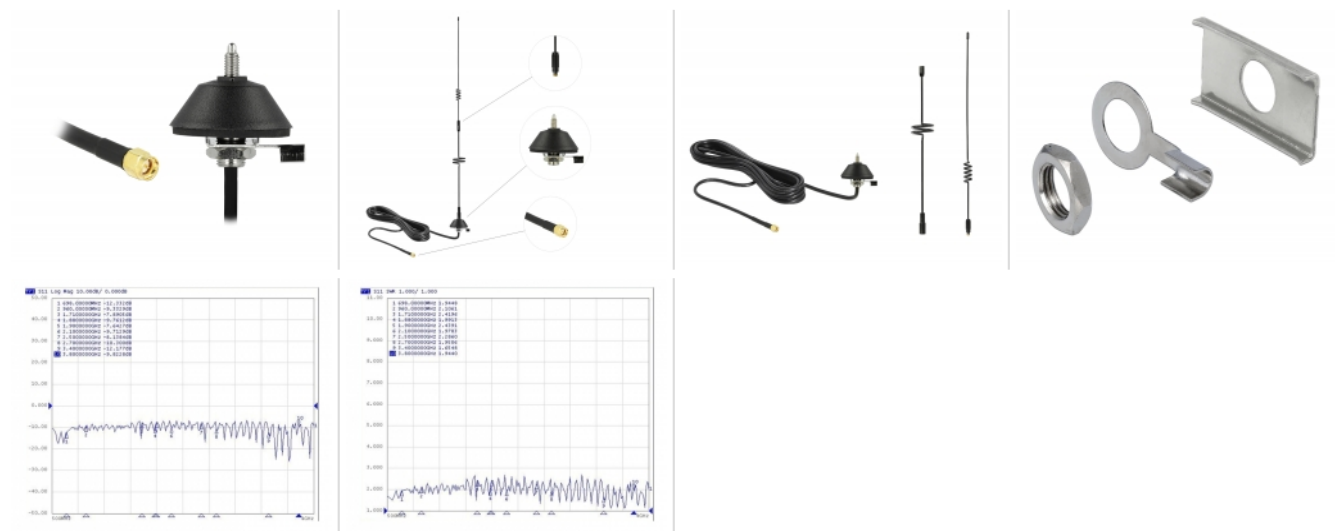



General	
Mounting type:	standard Wall mounting
Protection category:	standard IPX5
Suitable for outdoor:	standard yes
Interface	
connector:	standard 1 x SMA plug
Technical characteristics	
Frequency range:	standard 1710 MHz - 2170 MHz 2500 MHz - 2700 MHz 698 MHz - 960 MHz
Antenna gain:	standard 5 - 7 dBi
Impedance:	standard 50 Ω
Operating temperature:	standard -20 °C ~ 70 °C
Polarisation:	standard linear vertical
VSWR:	standard 1.5
Physical characteristics	
Housing material:	standard metal
Cable category:	standard coaxial
Cable type:	standard RG-58
Cable attenuation:	standard 0.6 dB @ 1 GHz per meter
Cable colour:	standard black
Cable diameter:	standard 4.95 mm
Cable length incl. connector:	standard 3.0 m
Dimensions (LxØ):	standard 56.3 x 4.5 mm